
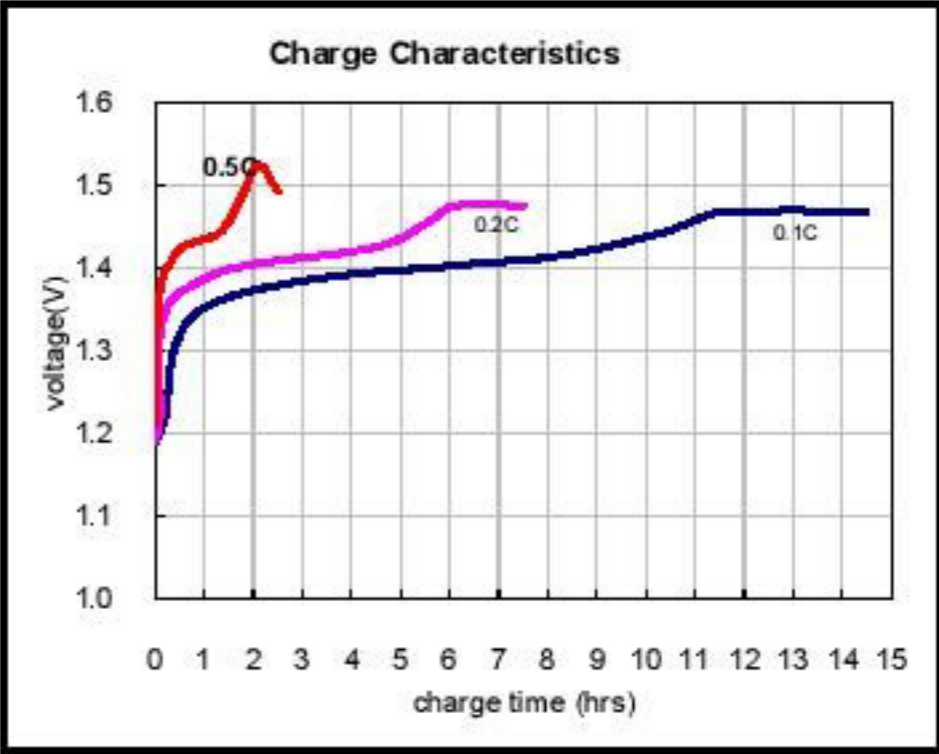
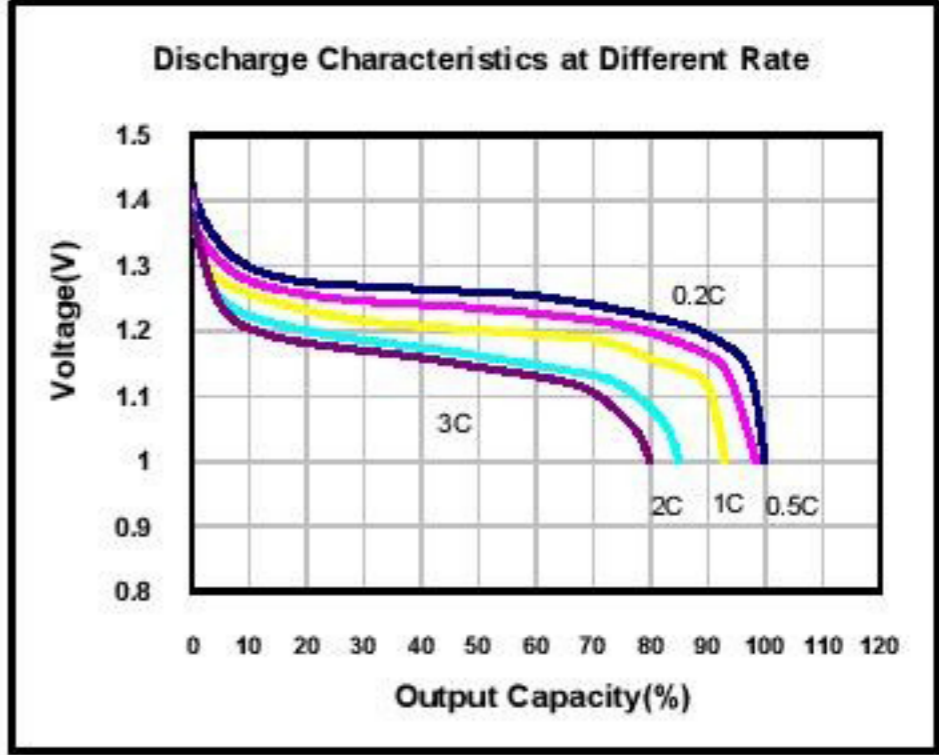
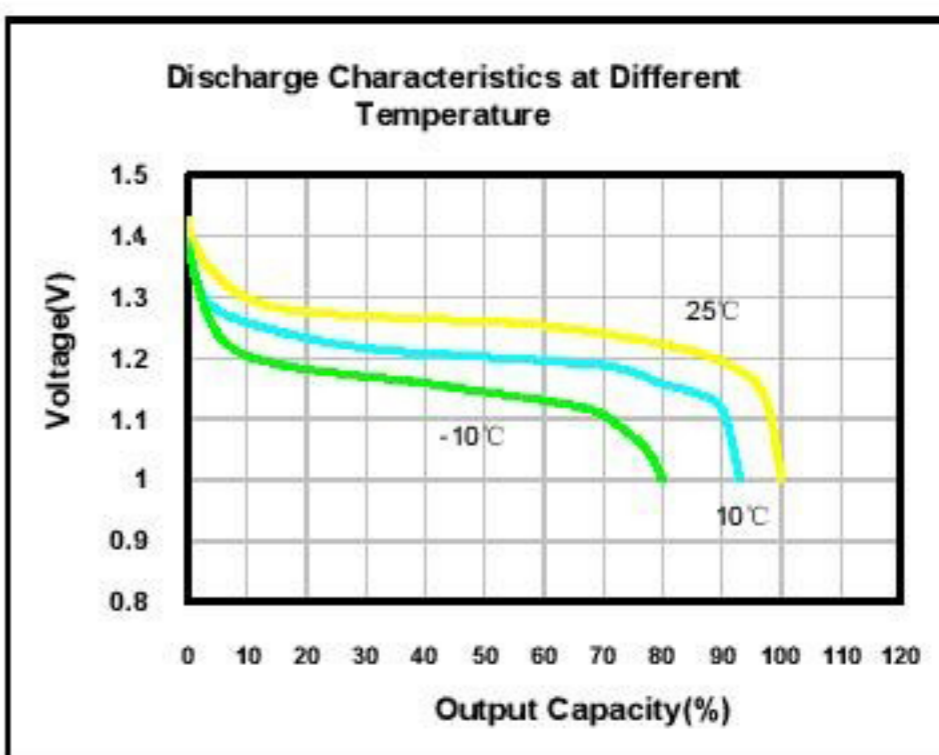
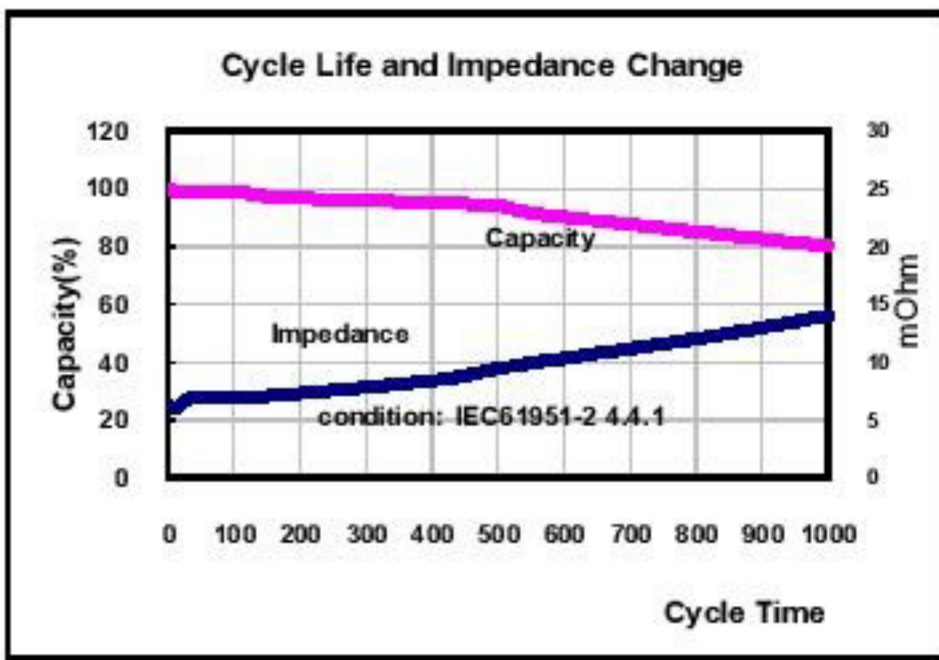


nominal voltage	1.2 V	conditions		
max. charge voltage	1.5 V	at standard charge (0.1C/20°C)		
capacity				
nominal	8000mAh	discharge at 0.2C		
minimal	>7200 mAh	discharge at 1C		
	8000mAh	discharge at 0.2C		
typical	8100mAh	1.0V end discharge voltage		
		ambient temperature 20°C		
		discharge at 0.2C °C		
Low Temperature Discharge	>6000mAh	discharged at 0.2C at -10°C		
max. discharge current	24000 mA	ambient temperature 20...50°C		
charge				
standard charge	charge current 800 mA	charge time 15hrs at 20°C		
quick charge	2400 mA	3.5hrs for empty battery		
recommended charge termination control parameters	-dV	0...10 mV		
	dT/dt	0.8...1°C per min		
	TCO	40...50°C		
trickle charge current	240...400 mA	(recommended)		
Charge retention	>7200mAh	discharge at 0.2C after storage 28 days at 20+/-5°C		
	>6400mAh	discharge at 0.2C after storage 6 months at 20+/-5°C		
	>4800mAh	discharge at 0.2C after storage 12 months at 20+/-5°C		
internal resistance	<6.5 mOhms	at 1000Hz battery fully charged		
life expectancy	>1000 cycles	IEC61951-2 standard		
ambient temperature range	0...45°C	standard charge		
	10...45°C	fast charge		
	-20...50°C	discharge		
	-10...45°C	storage less than 3 months		
	-10...35°C	storage less than 1 year		

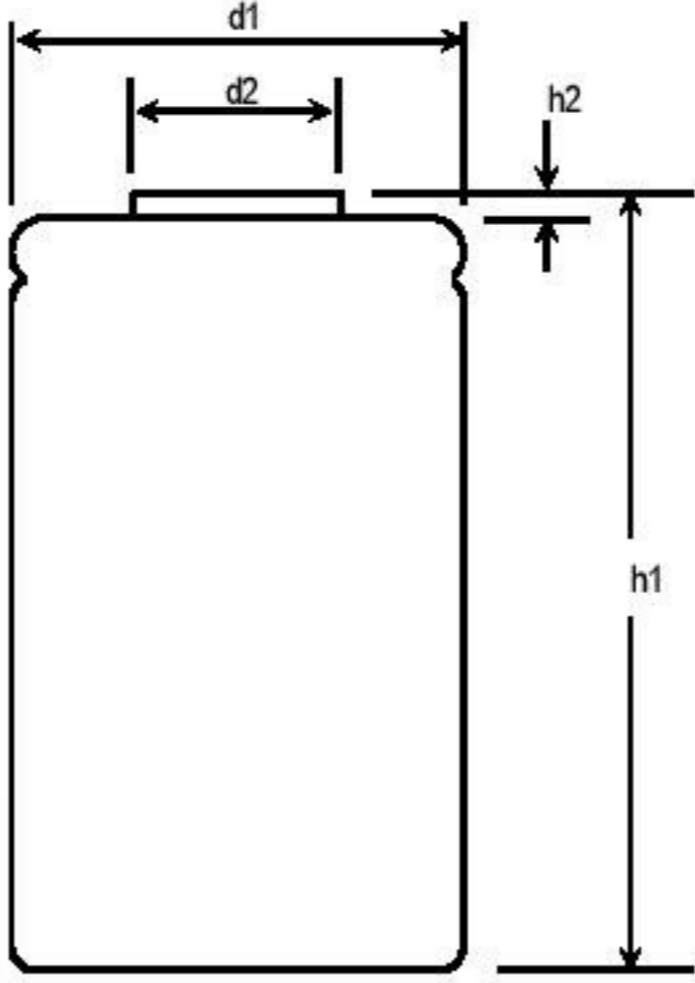

mechanical specifications

cell dimensions (with sleeve)

diameter d1 32.5+/-0.5 mm

diameter d2 8.0+/-0.4 mm

height h1 62.0-1.5 mm

height h2 3.8-0.5 mm

weight approx. 145 g

DATA SHEET FOR	Ni-MH instant D
VAPEXTECH DRAWING	in8000D
DRAWN BY / DATE	Herry Li/2009/02/20

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.